



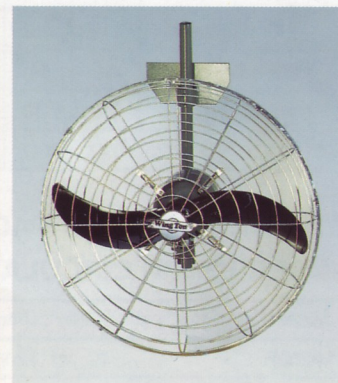

## WING TON AIR CIRCULATOR

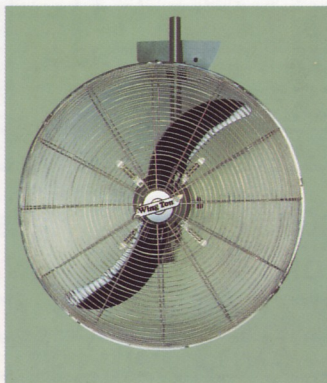

### FS SERIES.

1. Standing Air Circulator.
2. Available in 500mm & 630mm.
3. Fan motor is totally enclosed construction with dust seals, class E insulation and squirrel cage induction type with capacitor start and run.
4. Fan blade is made of high quality aluminum and is fully balanced.
5. The fan guard is a closely meshed, chromium-plated wire guard, The gap between guard wires is 13mm (Safety Guard)
6. The fan speed is adjustable by 3 speed and off regulator.
7. Fan is equipped with a height adjustable mechanism and supported by a strong cast iron base.
8. Provided with a 3-core flexible cable of 4.5 meters in length.
9. The fan is provided with oscillating and tilting mechanism for horizontal swing and vertical adjustment respectively.
10. Products designed according to BS EN 60335-2-80.
11. manufactured to ISO 9002.

### FW SERIES.

1. Wall mounting Air Circulator.
2. Available in 500mm & 630mm.
3. fan motor is totally enclosed construction with dust seals, class E insulation and squirrel cage induction type with capacitor start and run.
4. Fan blade is made of high quality aluminum and is fully balanced.
5. The fan guard is a closely meshed, chromium-plated wire guard. The gap between guard wires is 13mm (Safety Guard) or 43mm (Normal Guard).
6. The fan speed is adjustable by 3 speed and off regulator.
7. Provided with wall mounting kits and must be installed 2.3 meter above ground floor.
8. Provided with a 3-core flexible cable of 2 meters in length.
9. The fan is provided with oscillating and tilting mechanism for horizontal swing and vertical adjustment respectively.
10. Products designed according to BS EN 60335-2-80.
11. manufactured to ISO 9002.



CERTIFICATE NO.041008039



EMC







## GENERAL DATA FOR “WING TON” BRAND


### 51 SERIES AIR CIRCULATOR

	POSITION 1 (LOW)		POSITION 2 (MID)		POSITION 3 (HIGH)	
	220V	240V	220V	240V	220V	240V
FAN SPEED(PRM)	1120	1200	1280	1300	1400	1400
AIR DLVY (CFM)	4100	4100	4300	4300	4900	4900
(m³/min)	116	116	122	122	139	139
NOISE LEVEL (dB)	54	54	58	58	65	65
POWER INPUT(W)	110	110	120	120	150	140
CURRENT (A)	0.47	0.47	0.50	0.50	0.70	0.60

## STANDARD EXPORT PACKING FOR

### 51 SERIES AIR CIRCULATOR

DESCRIPTION	QTY/CARTON	N.W(kgs)	G.W(kgs)	MEASUREMENT(cbm)
MOTOR	2	12.10	12.76	0.024
BLADE	10	9.00	11.14	0.050
GUARD (Normal)	5	8.65	10.53	0.063
(Safety)	5	15.40	17.28	0.067
STANDING TUBE	10	21.00	21.96	0.032
CAST IRON BASE	1	7.80	8.15	0.011
WALL MOUNT KIT	10	27.50	27.80	0.038

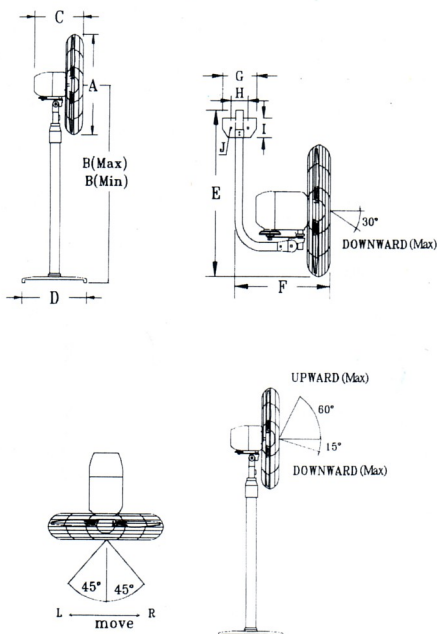

## GENERAL DATA FOR “WING TON” BRAND

### 63 SERIES AIR CIRCULATOR

	POSITION 1 (LOW)		POSITION 2 (MID)		POSITION 3 (HIGH)	
	220V	240V	220V	240V	220V	240V
FAN SPEED(PRM)	1120	1120	1280	1280	1400	1400
AIR DLVY (CFM)	5500	5500	6300	6300	7000	7000
(m³/min)	156	156	178	178	198	198
NOISE LEVEL (dB)	54.5	54.5	58.8	58.8	68	68
POWER INPUT(W)	125	135	140	150	170	175
CURRENT (A)	0.56	0.56	0.60	0.60	0.80	0.80

## STANDARD EXPORT PACKING FOR

### 63 SERIES AIR CIRCULATOR

DESCRIPTION	QTY/CARTON	N.W(kgs)	G.W(kgs)	MEASUREMENT(cbm)
MOTOR	2	13.30	14.00	0.031
BLADE	10	9.38	12.01	0.072
GUARD (Normal)	5	13.10	15.75	0.100
(Safety)	5	22.20	24.85	0.110
STANDING TUBE	10	24.30	25.56	0.054
CAST IRON BASE	1	9.65	10.10	0.015
WALL MOUNT KIT	10	27.50	27.80	0.038

Model No	Description Of Goods	Total Weight
FS51AA-HK	508mm 220V Standing Air Circulator,, Safety Guard	20Kg
FS51JA-BS	508mm 240V Standing Air Circulator, Safety Guard	
FW51AA-HK	508mm 220V Wall Mount Air Circulator, Safety Guard	12.9Kg
FW51JA-BS	508mm 240V Wall Mount Air Circulator, Safety Guard	
FW51AB-HK	508mm 220V Wall Mount Air Circulator, Normal Guard	11.5Kg
FW51JB-BS	508mm 240V Wall Mount Air Circulator, Normal Guard	
FS63AA-HK	635mm 220V Standing Air Circulator, Safety Guard	24.2Kg
FS63JA-BS	635mm 240V Standing Air Circulator, Safety Guard	
FW63AA-HK	635mm 220V Wall Mount Air Circulator, Safety Guard	14.8Kg
FW63JA-BS	635mm 240V Wall Mount Air Circulator, Safety Guard	
FW63AB-HK	635mm 220V Wall Mount Air Circulator, Normal Guard	13.0Kg
FW63JB-BS	635mm 240V Wall Mount Air Circulator, Normal Guard	

## ASSEMBLY

PEDESTAL TYPE: MOTOR+BLADE+GUARD  
+STANDING TUBE+CAST IRON BASE

WALL MOUNT TYPE:MOTOR+BLADE+GUARD+WALL MOUNT KIT

DIMENSION	FAN SIZE	A	B(Max)	B(Min)	C	D	E	F	G	H	I	J
Inch	20"	Ø22.36	53.15	45.28	13.62	20.71	28.90	16.73	8.98	4.48	4.53	Ø0.5
mm	508	Ø568	1350	1150	346	526	734	425	228	113.7	115	Ø12.7
Inch	25"	Ø27.13	59.06	50.79	14.53	26.06	30.90	17.52	8.98	4.48	4.53	Ø0.5
mm	635	Ø689	1500	1290	369	662	785	445	228	113.7	115	Ø12.7

\* THE DATA IS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.