

WALL MOUNT ROUND TYPE VERSION VENTILATING FANS

圆框手动及风压型家用抽气扇





DISPLAY WINDOW
VENTILATING FAN

厨窗换气扇

DWR15A

DWR20A





DISPLAY WINDOW
VENTILATING FAN

浴室换气扇

DWR10B

DWR15B




WINDOW KIT
VENTILATING FAN FITTINGS

窗夹组(换气扇配件)

DWR10B-01

DWR15B-01

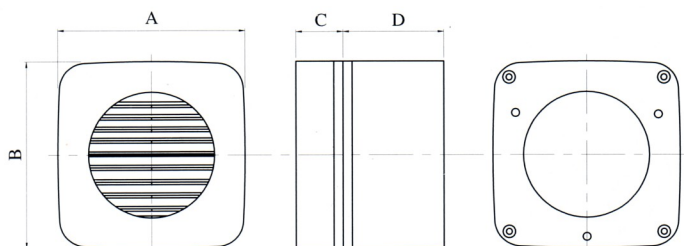

- Made of super-quality engineer plastic
- Super mute
- High efficient and low consumption
- Ultrathin light and handy
- Wear well

- 优质工程塑料制造
- 超级静音
- 高效低耗
- 超薄轻巧
- 经久耐用

DIMENSION 外形尺寸

Model 型号	A	B	C	D	E	F	G	H
DWR15A	150	208	85	44	41	40	177	(130)
DWR20A	200	272	104	50	54	43	238	(180)
DWR10B	100	188	33	101.5	110	--	--	--
DWR10B-01	148	148	21	58	--	--	--	--
DWR15B	150	235	35	106.5	156	--	--	--
DWR15B-01	200	200	31	56	--	--	--	--

TECHNICAL PERFORMANCE DATA 技术参数

Model 型号	R.Voltage 额定功率(V)	R.Frequency 额定频率(Hz)	Air volume 风量(m ³ /min)	Noise 噪音(dB)	Power 输入功率(w)	数量(台)/箱 SET/CTN	包装尺寸 Measurement(mm)
DWR15A	220	50	4.3	45	19	6	495x325x250
DWR20A	220	50	6.4	49	23	6	625x370x320
DWR10B	220	50	1.9	42	10	16	425x405x415
DWR15B	220	50	4.3	45	24	16	495x445x505



WALL MOUNT SQUARE TYPE VENTILATING FANS

方框型风压式家用抽气扇





STANDARD 标准型

Metal Frame 金属型	Plastic Frame 全塑型
DWS15A	DWS15C
DWS20A	DWS20C
DWS25A	DWS25C
DWS30A	DWS30C

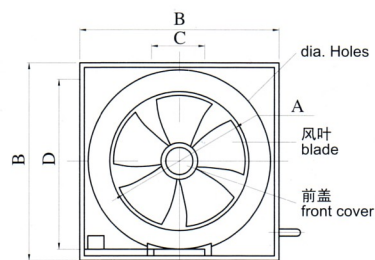

DELUXE
豪华型

DWS15B
DWS20B
DWS25B
DWS30B

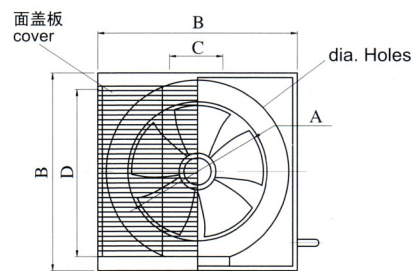

- Faceplate and cover are made of super-quality ABS engineering plastics.
- The painted metal frame is antirust and durable.
- Five-blades configuration creates larger air volume than the normal six-blades designs.
- High efficiency motor ensures low noise, low power consumption and long operation life.
- Motor with inner fuse protection.

- 面板、面罩采用优质工程塑料ABS料制造
- 金属框架经喷塑处理，防腐蚀，防生锈，牢固耐用
- 五片叶结构，比普通六片叶增大风量
- 高精度平衡和高性能材料电机，令换气扇噪音低，耗量更低，经久耐用
- 电机采用内置式熔断保护装置，安全可靠

DIMENSION 外形尺寸


Specification 型号	A	B	C	D	E	F	G	H	I
15A,15B/15C	150	240/230	--	197/195	170/190	52/50	75/80	55/72	87/--
20A,20B/20C	200	303/305	60/--	266/240	240/233	50/41	71/90	83/60	92/--
25A,25B/25C	250	350/334	110/--	313/280	390/274	50/49	80/85	58/70	92/--
30A,30B/30C	300	400/360	--	360/345	340/340	45/45	90/100	75/90	85/--

TECHNICAL PERFORMANCE DATA 技术参数




Model 型号	Diameter 规格(mm)	Air volume 风量(m³/min)	Noise 噪音(dB)	Power 输入功率(w)	数量(台)/箱 SET/CTN	包装尺寸 Measurement(mm)
DWS15A/DWS15C	150	4.5	38	20/22	6	565x495x320
DWS20A/DWS20C	200	8.2	41	30/25	6	705x486x356
DWS25A/DWS25C	250	12.5	43	36/30	4	645x400x400
DWS30A/DWS30C	300	18.2	49	40/32	4	690x450x450
DWS15B	150	4.5	39	20	6	565x575x320
DWS20B	200	8.2	42	30	6	695x575x356
DWS25B	250	12.5	44	36	4	795x400x400
DWS30B	300	18.2	50	40	4	835x450x450

CEILING MOUNT TYPE VENTILATING FANS

管道式家用抽气扇






DCS140A
DCS140B
DCS140C




DCS160A
DCS160B

DCS180A
DCS180B
DCS180C

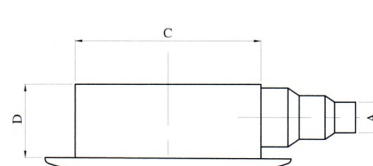

DCS200A
DCS200B
DCS200C
DCS200D
DCS200E

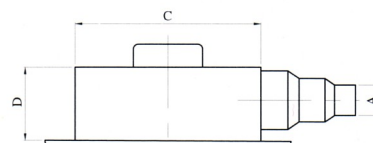

FOR DCS200C,D,E

- The unique metal manufacturing process bring the fireproof performance to almost perfection, which enables the product suitable to be used in places where fire control requirements are stringent.
- WingTon takes the domestic lead in the use of external rotor electric motors in the ventilation industry. The motors feature compact size, little wearing, low noise, good heat radiation. Stable operation and long operation life.
- The reasonable designing of the fan blades and the advanced roll-pressing process make the radian of the blades perfectly desirable. It effectively raises the wind pressure, increases wind volume, quiet fanning and low consumption of power energy.
- There are large varieties in specifications and models, with external rotor motor and internal rotor motor for options to meet different installation demands.
- 独特的金属制造工艺，防火功能达至顶峰，适用于防火要求高的场所。
- 国内同行中率先使用外转子电机，体积小，磨损小，噪音低，散热性好，运转更稳定，寿命更长
- 合理的叶片设计，先进的滚压工艺，令叶片弧度更完美，有效提高风压，增大风量，出风更静，能耗更低。
- 规格多样，有外转子电机和内转子电机以供选择，可满足不同场所的安装需要。

DIMENSION AND TECHNICAL DATA FOR "DCS" SERIES (220Volt,50Hz)外形尺寸和技术参数

Model 型号	Air volume 风量(m³/min)	Noise 噪音 (dB)	Power 输入功率(w)	数量(台)/箱 SET/CTN	A	B	C	D	E	Measurement 包装尺寸(mm)
*DCS140A	2	36	27	4	256	126	140	200	135	625x400x450
*DCS140B	2.5	37	29	4	256	126	140	200	135	625x400x450
*DCS140C	3	39	32	4	256	126	140	200	135	625x400x450
DCS160A	2	34	24	2	100	160	242	199	297	448x320x442
DCS160B	2.5	35	32	2	100	160	242	199	297	448x320x442
DCS180A	3.5	37	38	2	125	180	279	226	345	493x371x475
DCS180B	4.5	38	47	2	125	180	279	226	345	493x371x475
DCS180C	5.5	38	55	2	125	180	279	226	345	493x371x475
DCS200A	6.5	42	76	2	150	200	310	242	367	526x392x507
DCS200B	8	42	88	2	150	200	310	242	367	526x392x507
*DCS200C	10	46	110	1	200	240	387	278	476	500x315x610
*DCS200D	13	46	125	1	200	240	387	278	476	500x315x610
*DCS200E	16	50	130	1	200	240	387	278	476	500x315x610

Model 型号	Fsq	Gsq	H	Isq	J	K	L	M
DCS140A,B,C	230	270	13	300	108	45	90	87

* 配内转子电机 WITH INTERNAL ROTOR MOTOR

CEILING MOUNT TYPE VENTILATING FANS

管道式家用抽气扇



PERFORMANCE CURVES FOR "DCS" SERIES ("DCS"系列风量图)

